

T-SS-1000N-4B-VB



Full Port Stainless Steel 3 Piece - 4 Bolt Pattern Ball Valve w/ Vented Ball

Description

1/4 turn lever handle operated, CF8M Stainless steel, 3-piece, 4- bolt (swingout pattern), full port, solid vented ball, blow-out proof stem ball valve.

Features

- Latch lock handle, which can be locked in open or closed positions
- Vented Ball
- CF8M Investment Casted Stainless Steel Body
- Pressure rating: 1000 WOG / 150 WSP
- Teflon seats and stem packing
- Stainless Steel Ball & Stem
- 3-piece body design for easy maintenance

Accessories

- Repair Kit available
- Pneumatic/Electric Actuators Available

Warranty

The Company, for a period of one year from the date of shipment, warrants each product or system of its own manufacture to the original purchaser to be free from defects in material and workmanship under normal use, service and maintenance.

T-SS-1000N-4B-VB



Architect/Engineer approval

Job Name _____ Date _____
Model Specified _____ Quantity _____
Variations Specified _____
Customer/Wholesaler _____
Contractor _____
Architect _____

Note: Information subject to change without notice.



Jomar International Ltd.
7243 Miller Drive
Warren, MI 48092
Phone: 800-325-5690
Fax: 800-628-4194
www.jomar.com

© Copyright 2006 Printed in U.S.A.
T-SS-1000N-4B-VB
0406

Full Port Stainless Steel 3 Piece - 4 Bolt Pattern Ball Valve w/ Vented Ball



Description

1/4 turn lever handle operated, CF8M Stainless steel, 3-piece, 4- bolt (swingout pattern), full port, solid vented ball, blow-out proof stem ball valve.

Dimensions in Inches

Computer No.	Size	A	B	C	D
500-301VB	1/4"	2.56	0.46	2.30	3.94
500-302VB	3/8"	2.56	0.49	2.30	3.94
500-303VB	1/2"	2.56	0.59	2.44	3.94
500-304VB	3/4"	2.95	0.79	2.44	4.92
500-305VB	1"	3.35	0.98	3.03	5.87
500-306VB	1-1/4"	3.98	0.91	3.23	5.87
500-307VB	1-1/2"	4.41	1.50	3.94	7.48
500-308VB	2"	5.12	1.97	4.25	7.48
500-310VB	3"	7.40	3.00	5.71	9.84
500-311VB	4"	8.82	3.78	7.05	12.72



Material Specification

No.	Part Name	Material
1	Body	CF8M Stainless Steel
2	Cap (2)	CF8M Stainless Steel
3	Vented Ball	CF8M Stainless Steel
4	Stem	316 Stainless Steel
5	Seat	RTFE
6	Gasket	PTFE
7	Stem Packing	PTFE
8	Thrust Washer	PTFE
9	Gland Nut	304 Stainless Steel
10	Spring Washer	304 Stainless Steel
11	Stem Nut	304 Stainless Steel
12	Bolt (4)	304 Stainless Steel
13	Nut	304 Stainless Steel
14	Spring Washer	304 Stainless Steel
15	Lever Handle	304 Stainless Steel
16	Handle Sleeve	PVC

Pressure Rating

1/4"-4" 150 WSP

1/4"-4" 1000 WOG

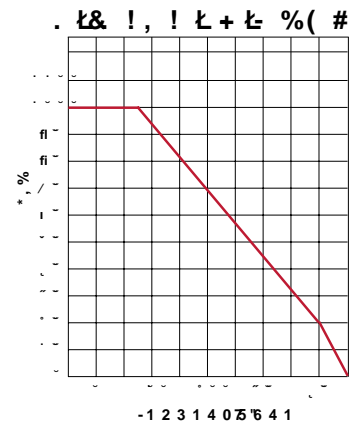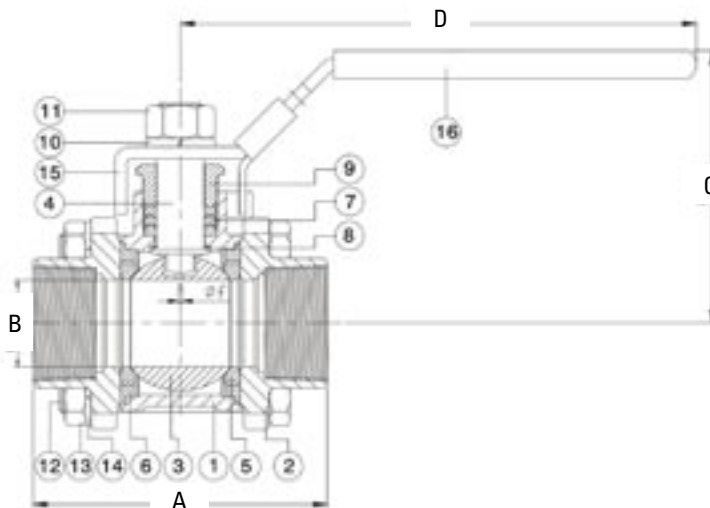

Note: Information subject to change without notice.



Jomar International Ltd.
7243 Miller Drive
Warren, MI 48092
Phone: 800-325-5690
Fax: 800-628-4194
www.jomar.com